

BACORI®

BACORI®
BEACON GARDEN TOOLS & ACCESSORY PART





This new design machine can be used for different working situation, with low-vibration function, long time working life, efficient stable performance.

5800F GASOLINE CHAINSAW

This new design machine can be used for different working situation, with low-vibration function, long time working life, efficient stable performance.



Parameters

	45cc	52cc	58cc
Displacement:	45cc	52cc	58cc
Max power:	1.7kw/7000rpm	2.0kw/7000rpm	2.3kw/7000rpm
Idling speed:	3000±200rpm	3000±200rpm	3000±200rpm

FUEL VOLUME

Fuel tank capacity:	550ml	550ml	550ml
Oil tank capacity:	260ml	260ml	260ml

Oil Mixture ratio: 25:1



BC430F/BC520F BRUSH CUTTER

This new design machine can be used for different working situation, with low-vibration function, long time working life, efficient stable performance.



Parameters

	43cc	52cc
Engine type:	1E40F-5	1E44F-5
Displacement:	42.7cc	52cc
Max power:	1.47kw/6500-7000rpm	1.65kw/6500-7000rpm
Idling speed:	3000±200rpm	3000±200rpm

FUEL VOLUME

Fuel tank capacity:	1200ml
---------------------	--------

Oil Mixture ratio: 25:1



Double layer filtration insulates sawdust effectively.

Primer bulb for easy starting, even in the very extreme climates.

Ergonomically designed handles with comfortable grip.

Saw Chain and Bar
Equipped with high performance chain and low kickback bar

Front Hand Guard
Reduce the risk of injury

Safety Trigger
Prevents accidental acceleration



Total Free Fuel and Oil Caps
Caps for fuel and oil tank require no extra tools to open or tighten

Anti-Vibration System
Helps to reduce operator fatigue



GASOLINE CHAINSAW

Beacon powerful chainsaw, the good choice of professionals and homeowners. Excellent power-to-weight ratio, low-vibration function, efficient stable performance, can find the suitable machines in the different situations.

GASOLINE CHAINSAW



2500 GASOLINE CHAINSAW

The most lightweight chain saw, small size, low vibration
Especially for firewood cutting, felling trees and pruning operations.



4500 GASOLINE CHAINSAW

Powerful long-lasting, high temperature performance
Particularly suitable for medium density wood felling.



3800



3800E



GASOLINE CHAINSAW 4500E

Powerful long-lasting, high temperature performance
Particularly suitable for medium density wood felling.



2500 GASOLINE CHAINSAW		3800 GASOLINE CHAINSAW		3800E GASOLINE CHAINSAW	
Parameters		Parameters		Parameters	
Displacement:	25.4cc	Displacement:	37.2cc	Displacement:	37.2cc
Max power:	0.9kw/7000rpm	Max power:	1.2kw/7000rpm	Max power:	1.2kw/7000rpm
Idling speed:	3000±200rpm	Idling speed:	3000±200rpm	Idling speed:	3000±200rpm
FUEL VOLUME		FUEL VOLUME		FUEL VOLUME	
Fuel tank capacity:	230ml	Fuel tank capacity:	310ml	Fuel tank capacity:	310ml
Oil tank capacity:	160ml	Oil tank capacity:	210ml	Oil tank capacity:	210ml
	Oil Mixture ratio: 25:1		Oil Mixture ratio: 25:1		Oil Mixture ratio: 25:1

4500 GASOLINE CHAINSAW			4500E GASOLINE CHAINSAW				
Parameters				Parameters			
Displacement:	45cc	52cc	58cc	Displacement:	45cc	52cc	58cc
Max power:	1.7kw/7000rpm	2.0kw/7000rpm	2.3kw/7000rpm	Max power:	1.7kw/7000rpm	2.0kw/7000rpm	2.3kw/7000rpm
Idling speed:	3000±200rpm	3000±200rpm	3000±200rpm	Idling speed:	3000±200rpm	3000±200rpm	3000±200rpm
FUEL VOLUME				FUEL VOLUME			
Fuel tank capacity:	550ml	550ml	550ml	Fuel tank capacity:	550ml	550ml	550ml
Oil tank capacity:	260ml	260ml	260ml	Oil tank capacity:	260ml	260ml	260ml
	Oil Mixture ratio: 25:1				Oil Mixture ratio: 25:1		

GASOLINE CHAINSAW



5200 GASOLINE CHAINSAW

Powerful long-lasting, high temperature performance. Particularly suitable for medium density wood felling.



6150 GASOLINE CHAINSAW

Powerful long-lasting, high temperature performance, excellent power-to-weight ratio. Particularly suitable for heavy duty task.



GASOLINE CHAINSAW 5200E

Powerful long-lasting, high temperature performance. Particularly suitable for medium density wood felling.



GASOLINE CHAINSAW 6200

Robust engine with strong power, high temperature performance. Particularly suitable for heavy duty task.



5200 GASOLINE CHAINSAW

Parameters	45cc	52cc	58cc
Displacement:	45cc	52cc	58cc
Max power:	1.7kw/7000rpm	2.0kw/7000rpm	2.3kw/7000rpm
Idling speed:	3000±200rpm	3000±200rpm	3000±200rpm
FUEL VOLUME			
Fuel tank capacity:	550ml	550ml	550ml
Oil tank capacity:	260ml	260ml	260ml

Oil Mixture ratio: **25:1**

5200E GASOLINE CHAINSAW

Parameters	45cc	52cc	58cc
Displacement:	45cc	52cc	58cc
Max power:	1.7kw/7000rpm	2.0kw/7000rpm	2.3kw/7000rpm
Idling speed:	3000±200rpm	3000±200rpm	3000±200rpm
FUEL VOLUME			
Fuel tank capacity:	550ml	550ml	550ml
Oil tank capacity:	260ml	260ml	260ml

Oil Mixture ratio: **25:1**

6150 GASOLINE CHAINSAW

Parameters	61.5cc
Displacement:	61.5cc
Max power:	2.5kw/7000rpm
Idling speed:	3000±200rpm
FUEL VOLUME	
Fuel tank capacity:	550ml
Oil tank capacity:	260ml

Oil Mixture ratio: **25:1**

6200 GASOLINE CHAINSAW

Parameters	62cc
Displacement:	62cc
Max power:	3.2kw/7000rpm
Idling speed:	3000±200rpm
FUEL VOLUME	
Fuel tank capacity:	670ml
Oil tank capacity:	350ml

Oil Mixture ratio: **25:1**



GASOLINE CHAINSAW

Powerful long-lasting, high temperature performance
Particularly suitable for medium density wood felling



5801



5802



5803



5804



GASOLINE CHAINSAW



5805



5806



5807



5808



5809



Parameters

Displacement:	45cc	52cc	58cc
Max power:	1.7kw/7000rpm	2.0kw/7000rpm	2.3kw/7000rpm
Idling speed:	3000±200rpm	3000±200rpm	3000±200rpm
FUEL VOLUME			
Fuel tank capacity:	550ml	550ml	550ml
Oil tank capacity:	260ml	260ml	260ml

Oil Mixture ratio: 25:1



BRUSH CUTTER

High-performance, powerful engine with high efficiency and fuel economy performance. Meet the needs of professional users with long time and large area of operations.



Primer bulb for easy starting.



Durable gear box for high intensity working situation




Easy starter ensures easier pulling and quicker starting. Resistance of pulling the start rope can be reduced up to 30%.

Heavy-duty gear case
With a shape specially designed to prevent catching on grass. Grease can be also supplied very easily.

Advanced Antivibration System

Ergonomical design handle

Air filter cover
Are easy to remove for fast and easy filter cleaning or replacement

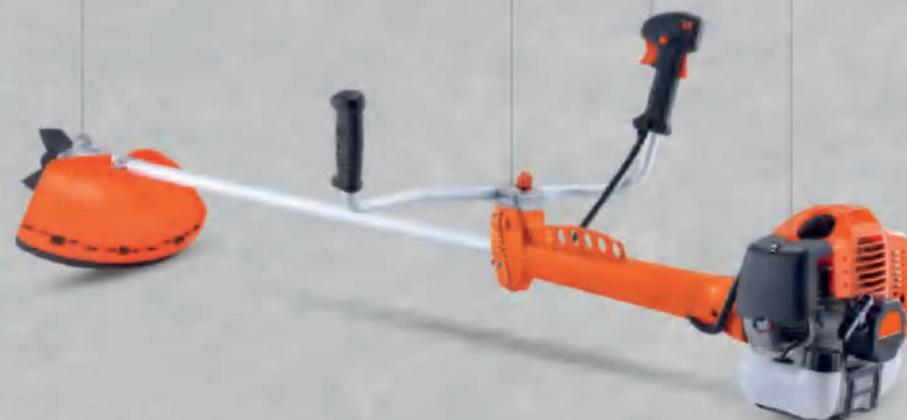

BRUSH CUTTER

The brush cutter can be used for different working situation, with low-vibration function, long time working life, efficient stable performance.

BRUSH CUTTER



High-performance, comfortable and light engine with high efficiency and fuel economy performance. Very suitable for user like housewife make the grass pruning in the garden, help you easy and funny to complete the work.



Detachable shaft
Detachable shaft allows for easy transport and storage



2STROKE

PRIMER PULL

2STROKE

PRIMER PULL

BC260A BRUSH CUTTER

BC260C BRUSH CUTTER

Parameters

Engine type: 1E34F
Displacement: 25.4cc
Max power: 0.7kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 650ml



Oil Mixture ratio: 25:1

Parameters

Engine type: 1E34F
Displacement: 25.4cc
Max power: 0.7kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 650ml



Oil Mixture ratio: 25:1

BRUSH CUTTER



High-performance, powerful engine with high efficiency and fuel economy performance. Meet the needs of professional users with long time and large area of operations.



Detachable shaft
Detachable shaft allows for easy transport and storage



EASY START

2STROKE

PRIMER PULL

EASY START

2STROKE

PRIMER PULL

BC330A BRUSH CUTTER

BC330B BRUSH CUTTER

Parameters

Engine type: 1E36F
Displacement: 32.6cc
Max power: 0.9kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 1000ml



Oil Mixture ratio: 25:1

Parameters

Engine type: 1E36F
Displacement: 32.6cc
Max power: 0.9kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 1000ml



Oil Mixture ratio: 25:1

BRUSH CUTTER



High-performance, powerful engine with high efficiency and fuel economy performance.
Meet the needs of professional users with long time and large area of operations.



Detachable shaft
Detachable shaft allows for easy transport and storage



EASY START

2 STROKE

TRIMER
BLEB

EASY START

2 STROKE

TRIMER
BLEB

BC430A/BC520A

BRUSH CUTTER

Parameters



Engine type:	1E40F-5	1E44F-5
Displacement:	42.7cc	52cc
Max power:	1.47kw/6500-7000rpm	1.65kw/6500-7000rpm
Idling speed:	3000±200rpm	3000±200rpm

FUEL VOLUME

Fuel tank capacity:	1200ml	1200ml
---------------------	--------	--------



Oil Mixture ratio: **25:1**

BC430B/BC520B

BRUSH CUTTER

Parameters



Engine type:	1E40F-5	1E44F-5
Displacement:	42.7cc	52cc
Max power:	1.47kw/6500-7000rpm	1.65kw/6500-7000rpm
Idling speed:	3000±200rpm	3000±200rpm

FUEL VOLUME

Fuel tank capacity:	1200ml	1200ml
---------------------	--------	--------



Oil Mixture ratio: **25:1**

BRUSH CUTTER



High-performance, powerful engine with high efficiency and fuel economy performance.
Meet the needs of professional users with long time and large area of operations.



Detachable shaft
Detachable shaft allows for easy transport and storage



EASY START

2 STROKE

TRIMER
BLEB

EASY START

2 STROKE

TRIMER
BLEB

BC430C/BC520C

BRUSH CUTTER

Parameters



Engine type:	1E40F-5	1E44F-5
Displacement:	42.7cc	52cc
Max power:	1.47kw/6500-7000rpm	1.65kw/6500-7000rpm
Idling speed:	3000±200rpm	3000±200rpm

FUEL VOLUME

Fuel tank capacity:	1200ml	1200ml
---------------------	--------	--------



Oil Mixture ratio: **25:1**

BC430D/BC520D

BRUSH CUTTER

Parameters



Engine type:	1E40F-5	1E44F-5
Displacement:	42.7cc	52cc
Max power:	1.47kw/6500-7000rpm	1.65kw/6500-7000rpm
Idling speed:	3000±200rpm	3000±200rpm

FUEL VOLUME

Fuel tank capacity:	1200ml	1200ml
---------------------	--------	--------



Oil Mixture ratio: **25:1**

BRUSH CUTTER



High-performance, powerful engine with high efficiency and fuel economy performance.
Meet the needs of professional users with long time and large area of operations.



Detachable shaft
Detachable shaft allows for easy transport and storage



BC430H/BC520H BRUSH CUTTER

Parameters



Engine type:	1E40F-5	1E44F-5
Displacement:	42.7cc	52cc
Max power:	1.47kw/6500-7000rpm	1.65kw/6500-7000rpm
Idling speed:	3000±200rpm	3000±200rpm

FUEL VOLUME

Fuel tank capacity: 1200ml



Oil Mixture ratio: 25:1

BC430W/BC520W BRUSH CUTTER

Parameters



Engine type:	1E40F-5	1E44F-5
Displacement:	42.7cc	52cc
Max power:	1.47kw/6500-7000rpm	1.65kw/6500-7000rpm
Idling speed:	3000±200rpm	3000±200rpm

FUEL VOLUME

Fuel tank capacity: 1200ml



Oil Mixture ratio: 25:1

BRUSH CUTTER



High-performance, powerful engine with high efficiency and fuel economy performance.
Meet the needs of professional users with long time and large area of operations.



Detachable shaft
Detachable shaft allows for easy transport and storage



BC411(ROB) BRUSH CUTTER

Parameters



Engine type:	1E40F-6
Displacement:	40.2cc
Max power:	1.4kw/6500-7000rpm
Idling speed:	3000±200rpm

FUEL VOLUME

Fuel tank capacity: 950ml



Oil Mixture ratio: 25:1

BC411(MKT) BRUSH CUTTER

Parameters



Engine type:	1E40F-6
Displacement:	40.2cc
Max power:	1.4kw/6500-7000rpm
Idling speed:	3000±200rpm

FUEL VOLUME

Fuel tank capacity: 950ml



Oil Mixture ratio: 25:1

BRUSH CUTTER



High-performance, powerful engine with high efficiency and fuel economy performance. Meet the needs of professional users with long time and large area of operations.



Detachable shaft
Detachable shaft allows for easy transport and storage



EASY START

2STROKE

POWER BLEB

2STROKE

POWER BLEB

BC615 BRUSH CUTTER

Parameters



Engine type: IE48F
Displacement: 62cc
Max power: 2.0kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME
Fuel tank capacity: 1200ml

Oil Mixture ratio: 25:1

B45 BRUSH CUTTER

Parameters



Engine type: IE41F
Displacement: 41.5cc
Max power: 1.5kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME
Fuel tank capacity: 1000ml

Oil Mixture ratio: 25:1

BRUSH CUTTER



4 stroke engine uses overhead Cam mechanism, Smooth operation, Little vibration, Low fuel consumption, Low noise, through the optimization of oil system, lubrication system, heavy parts material to improve gasoline engine combustion efficiency and to prolong service life.



Detachable shaft
Detachable shaft allows for easy transport and storage



4STROKE

POWER BLEB

EASY START

POWER BLEB

4STROKE

BC139 BRUSH CUTTER

Parameters



Engine type: 139F
Displacement: 31cc
Max power: 0.7kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME
Fuel tank capacity: 700ml

4 stroke oil 92# fuel

BC140 BRUSH CUTTER

Parameters



Engine type: 140F
Displacement: 35cc
Max power: 0.9kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME
Fuel tank capacity: 650ml

4 stroke oil 92# fuel

BRUSH CUTTER

High-performance, powerful engine with high efficiency and fuel economy performance. Meet the needs of professional users with long time and large area of operations.



BRUSH CUTTER

The backpack brush cutter fixed engine on the support of ergonomic harness, not only to keep the operator balance, but to reduce the strain on the shoulders. With soft shaft part and loop handle, it can make quick work on the area what is hard to reach for side-attached brush cutter.



	BG330	BG430	BG520	BG139	BG140
Parameters					
Engine type:	1E36F	1E40F-5	1E44F-5	139F	140F
Displacement:	32.6cc	42.7cc	52cc	31cc	35cc
Max power:	0.9kw/6500rpm	1.47kw/6500-7000rpm	1.65kw/6500-7000rpm	0.7kw/6500-7000rpm	0.9kw/6500-7000rpm
Idling speed:	3000±200rpm	3000±200rpm	3000±200rpm	3000±200rpm	3000±200rpm
FUEL VOLUME					
Fuel tank capacity:	1000ml	1200ml	1200ml	700ml	650ml
 Oil Mixture ratio:	25:1	25:1	25:1	 4 stroke oil 92# fuel	 4 stroke oil 92# fuel

MULTI-PURPOSE TOOLS



Detachable shaft
Detachable shaft allows for easy transport and storage

POWER HEAD
EASY START



MULTI-PURPOSE TOOLS

Multi-purpose tools is the perfect machine for all season garden maintenance. Featuring several individual tools. It features a heavy duty quick release aluminium drive shaft coupling, enabling the attachments to be changed in seconds.



MT260



MT330



MT430



MT520



MT140



Parameters

Engine type:	1E34F	1E36F	1E40F-5	1E44F-5	140F
Displacement:	25.4cc	32.8cc	42.7cc	52cc	35cc
Max power:	0.7kw/6500-7000rpm	0.9kw/6500rpm	1.47kw/6500-7000rpm	1.65kw/6500-7000rpm	0.9kw/6500-7000rpm
Idling speed:	3000±200rpm	3000±200rpm	3000±200rpm	3000±200rpm	3000±200rpm
FUEL VOLUME					
Fuel tank capacity:	650ml	1000ml	1200ml	1200ml	650ml

Oil Mixture ratio: **25:1** **25:1** **25:1** **25:1** **4 stroke oil 92# fuel**



HEDGE TRIMMER



HT230B

HEDGE TRIMMER

This hedge trimmer can be used for different working situation, with low-vibration function, long time working life, efficient stable performance.



Parameters



Displacement: 22.5cc
 Max power: 0.65kw/6500-7000rpm
 Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 500ml
 Oil tank capacity:



Oil Mixture ratio: **25:1**

HT230A

HEDGE TRIMMER

Parameters



Displacement: 22.5cc
 Max power: 0.65kw/6500-7000rpm
 Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 500ml
 Oil tank capacity:



This hedge trimmer can be used for different working situation, with low-vibration function, long time working life, efficient stable performance.



Oil Mixture ratio: **25:1**

HT230C

HEDGE TRIMMER

This hedge trimmer can be used for different working situation, with low-vibration function, long time working life, efficient stable performance.



Parameters



Displacement: 22.5cc
 Max power: 0.65kw/6500-7000rpm
 Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 500ml
 Oil tank capacity:



Oil Mixture ratio: **25:1**

GASOLINE WATER PUMP



WP10A

GASOLINE WATER PUMP

Parameters



Mating engine: 1E30F
Max power: 0.9kw/6500-7000rpm
Discharging capacity: 32.6cc

Flow: 8m³/h
Suction height: 8m
Lift height: 30m
Connection system: 1 inch



Oil Mixture ratio: 25:1



WP10B

GASOLINE WATER PUMP

Parameters



Mating engine: 1E40F-6
Max power: 1.4kw/6500-7000rpm
Discharging capacity: 40.2cc

Flow: 8m³/h
Suction height: 8m
Lift height: 30m
Connection system: 1 inch



Oil Mixture ratio: 25:1



GASOLINE WATER PUMP



WP10C

GASOLINE WATER PUMP

Parameters



Mating engine: 140F
Max power: 0.9kw/6500-7000rpm
Displacement: 35cc
Idling speed: 3000±200rpm

Flow: 8m³/h
Suction height: 8m
Lift height: 30m
Connection system: 1 inch



4 stroke oil 92# fuel



WP15

GASOLINE WATER PUMP

Parameters



Mating engine: 1E44F-5
Max power: 1.65kw/6500-7000rpm
Discharging capacity: 52cc

Flow: 8m³/h
Suction height: 8m
Lift height: 35m
Connection system: 1.5 inch



Oil Mixture ratio: 25:1



EARTH AUGER



Powerful driving force, High drilling efficiency, low vibration function, suitable for different working situation, different sizes of drill bits for you choose.



EARTH AUGER



Powerful driving force, High drilling efficiency, low vibration function, suitable for different working situation, different sizes of drill bits for you choose.



G0520A

EARTH AUGER

Parameters



Engine type: 1E44F-5
Displacement: 52cc
Max power: 1.65kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 1200ml



Oil Mixture ratio: 25:1

G0520B

EARTH AUGER

Parameters



Engine type: 1E44F-5
Displacement: 52cc
Max power: 1.65kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 1200ml



Oil Mixture ratio: 25:1

G0520C

EARTH AUGER

Parameters



Engine type: 1E44F-5
Displacement: 52cc
Max power: 1.65kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 1200ml



Oil Mixture ratio: 25:1

G0520D

EARTH AUGER

Parameters



Engine type: 1E44F-5
Displacement: 52cc
Max power: 1.65kw/6500-7000rpm
Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 1200ml



Oil Mixture ratio: 25:1

Riding Lawn Mower

RLM-1

Parameters



30 Inch

Riding lawn mower

Mowing width: 76-78cm
 Tank capacity: 4.2L
 Mowing height and gear:
 20-90mm/6
 Grass Catcher: 170L
 Chassis material: steel
 Tire Size: 10 "/15"
 Grass collection function:
 collection bag, broken grass,
 side row and back row
 Product size: 1550*850*1150mm
 Package size:1740*980*770mm/7
 50*400*750mm
 Net weight: 160kg
 Gross weight: 180kg
 Displacement: 344cc

Riding Lawn Mower

RLM-2

Parameters



40 Inch

Riding lawn mower

Horsepower:15.5HP
 Displacement:500cc
 Oil Capacity:1.4L
 Fuel Tank Capacity:4L
 Mowing Cutting Width:102cm
 Mower Cutting Height Range:
 30-90 mm/7 positons
 Tires-Front:15"x6-6 Turf
 Tires-Rear:18"x8.5-8 Turf
 Wheeltrack-Front:900 mm
 Wheeltrack- Back:930 mm
 Total Weight:230 kg
 Grass Catcher:300L
 Packaging Size:1980*1135*860mm
 Container Qty:36 set(40HQ)

Riding Lawn Mower

RLM-3

Parameters



33 Inch

*Riding lawn mower
(Yellow/Red)*

Product model:ESTATE 384
displacement:452cc
Engine:STIGA ST500 452 cc
single cylinder
Forward/backward speed:
0-8.8Km/H 0-3.8Km/H
Transmission/propulsion mode:
Hydraulic rear axle drive
Width of grass cutting:33"(84cm)
Tank capacity: 6L
Cutting height: 25-70mm
seven gears adjustable
Turning radius:65cm
Front and rear wheel dimensions:
15"6. 00-6
18 "8. 50-8
Weight:228Kg
Wooden case size: 170*110*85 cm

Riding Lawn Mower

RLM-4

Parameters



40 Inch

Riding lawn mower

Engine brand: Honda GX690
Engine mode: Air-cooled 4 stroke
Power/HP kw(ps)/rpm: 16.5w(22.4ps)
/3600
Starting mode: electric starting
Tank capacity :20L
Brake device: internal expansion brake
Front and rear wheel pitch mm:1300
Front wheel pitch/Rear wheel pitch mm:
Front :860 Rear :800
Walking speed change :HST
Walking speed: Low speed 0~7.7KM/h
high speed 0~13.8KM/h
Small turning radius :≤2000mm
Climbing Angle :25°
Cutting width: 975mm
Cutting height: 0~150mm(21 knots)
Cutter device: freestyle & segment type
Cutter quantity :2 pieces
Body weight kg:365
Machine size (mm):1947X1050X1015

Push Lawn Mower

16/18 inch

Parameters



16 inch

Engine type :1P56F
 Displacement :99cc
 Speed :3000 rpm
 Mowing width :41cm
 Adjustment height :20-75mm
 Gear adjustment :7
 Sack volume: 45L
 Net weight: 20kg
 Gross weight: 23kg
 Packing size: 70*49.5*42CM



18 inch

Engine type :1P65F
 Displacement :139cc
 Speed :3000 rpm
 Mowing width :46cm
 Adjustment height :25-75mm
 Gear adjustment :5
 Sack volume: 55L
 Net weight: 30kg
 Gross weight: 33kg
 Packing size: 78*53*44CM

Push Lawn Mower

20/21 inch

Parameters



20 inch

Engine type :1P70F
 Displacement :173cc
 Speed :3000 rpm
 Mowing width :51cm
 Adjustment height :25-75mm
 Gear adjustment :7
 Sack volume: 55L
 Net weight: 33kg
 Gross weight: 36kg
 Packing size: 82*54*44CM



21 inch

Engine type :1P70F
 Displacement :173cc
 Speed :3000 rpm
 Mowing width :53cm
 Adjustment height :25-75mm
 Gear adjustment :7
 Sack volume: 60L
 Net weight: 34kg
 Gross weight: 37kg
 Packing size: 85*56*44CM

Small Electric Lawn Mower

lawn mower

Parameters



4.5V



Telescopic buckle

20V



20V



12V

Small Electric Lawn Mower

lawn mower

Parameters



MT520

GASOLINE MINI TILLER

With thick luxury frame, safe and comfortable operating system, gasoline mini tiller will let you find more funs in your garden.

Parameters



Engine type: IE44F-5
 Displacement: 52cc
 Max power: 1.65kw/6500-7000rpm
 Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 1200ml
 Oil tank capacity:



Oil Mixture ratio: 25:1

HBC520

GASOLINE HAND-PUSH BRUSH CUTTER

With thick luxury frame, safe and comfortable operating system, gasoline hand-push brush cutter will reduce the workloads much.

Parameters



Engine type: IE44F-5
 Displacement: 52cc
 Max power: 1.65kw/6500-7000rpm
 Idling speed: 3000±200rpm

FUEL VOLUME

Fuel tank capacity: 1200ml
 Oil tank capacity:



Oil Mixture ratio: 25:1

ACCESSORIES

